



# ELIT

## Air-termination rod wall mounted 7m 2-piece


Wall-mounted 2-part air-termination pole 7m in stainless A2 steel for interior HVC conductor

### Technical description

Distance tube type: Ø 60 mm, 3.0 m length (with flange plate)  
Distance tube material: stainless steel V2A  
Distance tube type: Ø 42 mm, 1.9 m length (with flange plate)  
Type: 2-part  
Length of parts: 3.0 m / 3.6 m, (+ 0.4 m ventilation rod)  
Required wall mount: [2x] Type C  
Unsupported length FL1: 6.0 m  
Clamp length EL1: 1.0 m

### Advantages:

Wall-mounted 2-part air-termination pole 7m in stainless steel  
Mounted on the wall with 2. pcs. fasteners (not included)  
According to EN 62561-2 for internal routing of HVC conductor  
Max. wind speed:  
Safety factor for wind 1.0: 198 km/h  
Safety factor for wind 1.5: 162 km/h

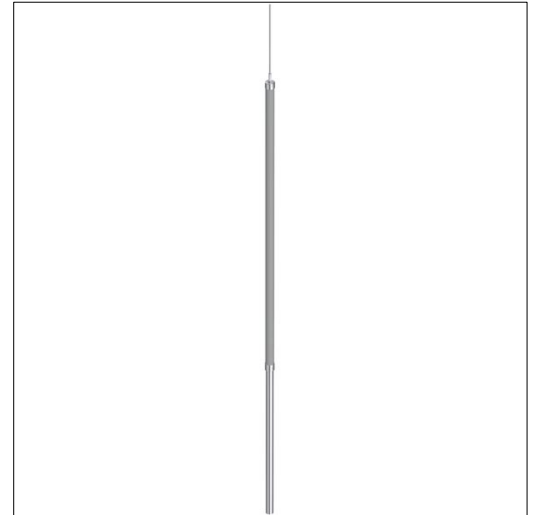

Product name/ Art.nr/ GTIN	ELIT LOFV7M-V2A-HVC-DIR/ 40150165/ 7070810034109
According to:	EN 62561-2, IEC/TS 62561-8
Length	7000 Millimetre
Diameter	60 - 10 Millimetre
Model	Interception rod with connection flange
Material	Stainless steel 304 (V2A)
Surface protection	Other
Connection	Round conductor
High-voltage-proof insulated model	Yes