




ELIT

Freestanding air termination pole V2A Alu 5m





Freestanding air-termination pole 5.0m in stainless A2 steel with stand and concrete foundation

Technical description

Air-termination pole: stainless steel V2A, Ø 42/36mm
 Air-termination rod: aluminum, Ø 16/10 mm
 Total height: 5.0 m
 Type: 2-part
 Length of parts: 3500 mm/1500 mm
 Concrete foundation: 3 x 20 kg
 Required installation area: approx. 1285 x 1235 mm
 Designed for wind zone 2:
 max. wind speed, static safety factor 1.0: 155 km/h
 max. wind speed, static safety factor 1.5: 126 km/h
 Manufactured in accordance with EN62561-2.

Advantages:

Freestanding air-termination pole 5.0m in stainless A2 steel and aluminium
 Max. wind speed, static safety factor 1.0: 155 km/h
 Max. wind speed, static safety factor 1.5: 126 km/h
 Manufactured in accordance with EN62561-2.

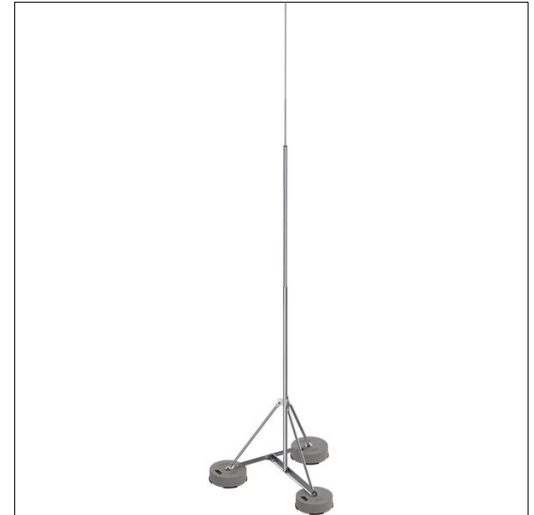

Product name/ Art.nr/ GTIN	ELIT FLOPF-5M-V2AALU-BETONG/ 40150187/ 7070810034468
According to:	DIN EN62561-2
Length	5000 Millimetre
Diameter	42 - 10 Millimetre
Model	Interception rod with tripod
Material	Aluminium/stainless steel 304 (V2A)
Surface protection	Hot-dip galvanized
Connection	Round conductor