



# ELIT

## Air-termination pole wall mounted 5m V2A HVC

Wall-mounted 2-part air-termination pole 5m in stainless A2 steel and alu for interior HVC-instal.

### Technical description

Wall-mounted air-termination pole with a length of 5.0 m for internal installation of HVC conductor.

Type: 2-part, total length 5.0 m

Standpipe: stainless A2 steel, Ø 42 mm, 2.0 m length

Spacer standpipe: stainless A2 steel, Ø 42 mm, 0,9 m length

Insulated part: glass fibre reinforced plastic (GFK), Ø 48 mm, 1.7 m length.

Air-termination rod: aluminium, Ø 10 mm, 400 mm length.

Required wall mount: [2x] Type B

Unsupported length FL1: 4.30 m

Clamp length EL1: 0.70 m

Max. wind speed:

Safety factor for wind 1.0: 196 km/h /

Safety factor for wind 1.5: 160 km/h

Manufactured in accordance with DIN EN 62561-2 and DIN IEC/TS 62561-8.



### Advantages:

Wall-mounted lightning air-termination pole made of corrosion-resistant A2 steel

2-piece with a total length of 5.0 meters

Mounted on the wall with 2 x Type B wall brackets

Manufactured according to DIN EN 62561-2 and DIN IEC/TS 62561-8

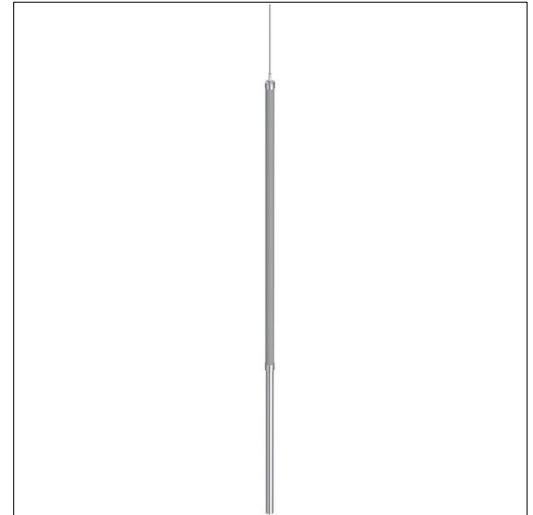

Product name/ Art.nr/ GTIN	ELIT LOFV5M-V2A-HVC-DIR/ 40150197/ 7070810036257
According to:	DIN EN 62561-2, DIN IEC/TS 62561-8
Length	5000 Millimetre
Diameter	48 - 10 Millimetre
Model	Interception rod tapered
Material	Aluminium/stainless steel 304 (V2A)
Surface protection	Hot-dip galvanized
Connection	Round conductor