



# ELIT

## Wall-mounted air-termination pole V2A Alu 4m

Wall-mounted air-termination pole 4m in stainless A2 steel and alu for interior HVC-installation

### Technical description

Wall-mounted air-termination pole with a length of 4.0 m for internal installation of HVC conductor.

Type: 1-part, total length 4.0 m

Standpipe: stainless A2 steel, Ø 42 mm, 1.9 m length

Insulated part: glass fibre reinforced plastic (GFK), Ø 48 mm, 1.7 m length.

Air-termination rod: aluminium, Ø 10 mm, 400 mm length.

Required wall mount: [2x] Type A

Unsupported length FL1: 3.0 m

Clamp length EL1: 1.0 m

Max. wind speed:

Safety factor for wind 1.0: 149 km/h /

Safety factor for wind 1.5: 122 km/h

Manufactured in accordance with DIN EN 62561-2 and DIN IEC/TS 62561-8.


### Advantages:

Wall-mounted lightning air-termination pole made of corrosion-resistant A2 steel

Total length of 4.0 meters

Mounted on the wall with 2 x Type A wall brackets

Manufactured according to DIN EN 62561-2 and DIN IEC/TS 62561-8

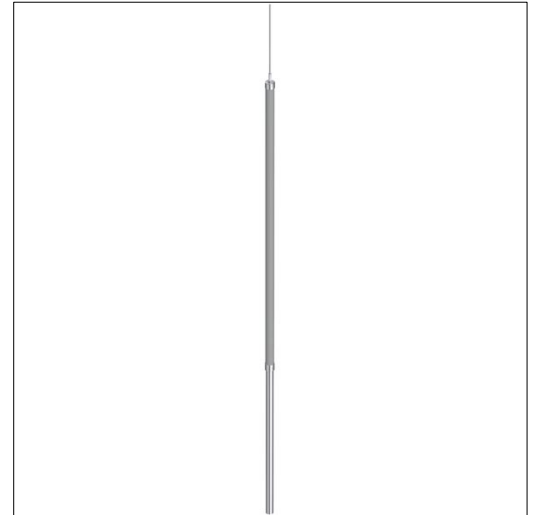

Product name/ Art.nr/ GTIN	ELIT LOFV4M-V2A-HVC-DIR/ 40150205/ 7070810036592
According to:	DIN EN 62561-2, DIN IEC/TS 62561-8
Length	4000 Millimetre
Diameter	48 - 10 Millimetre
Model	Interception rod tapered
Material	Aluminium/stainless steel 304 (V2A)
Surface protection	Hot-dip galvanized
Connection	Round conductor