




# ELIT

## Freestanding 2-part lightning arrester 8m w/HVC

Necessary set-up area:





Freestanding 2-part air-termination set 8.0m w/HVC flange, stand and concrete foundations

### Technical description

Freestanding 2-part air-termination set for HVC conductors with stand and concrete foundations.  
 Material and dimensions of mast: stainless A2-steel, Ø 60 mm, 2.5 m length.  
 Material and dimensions of insulated support: Glass fiber reinforced plastic, Ø 48 mm, 1.7 m length.  
 Material and dimensions of arrester tip: Aluminum, Ø 32/22/10 mm, 3,8 m length.  
 Wind speed with a static safety factor of 1.0: 125 km/h  
 Wind speed with a static safety factor of 1.5: 102 km/h

### Advantages:

Freestanding 2-piece air-termination set w/stand and base  
 Specially designed for up to 4 x HVC conductors  
 Manufactured in accordance with EN 62561-2, IEC/TS 62561-8

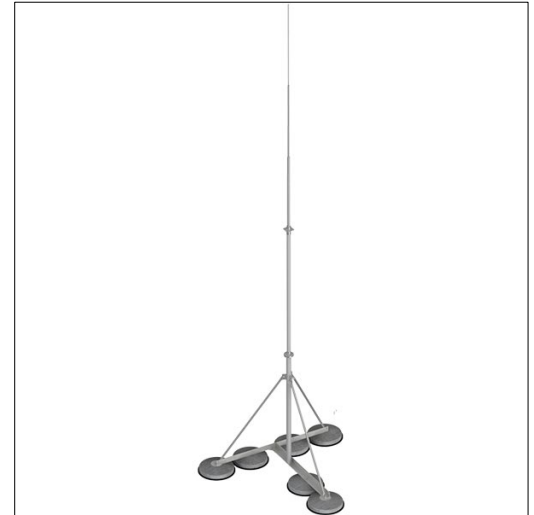

Product name/ Art.nr/ GTIN	ELIT FOM8000K1D-ø10-42mm-ALSS/ 40150210/ 7070810037773
According to:	DIN EN 62561-2, DIN IEC/TS 62561-8
Length	8000 Millimetre
Diameter	48 - 10 Millimetre
Model	Interception rod with tripod
Material	Aluminium/stainless steel 304 (V2A)
Surface protection	Hot-dip galvanized
Connection	Round conductor