





ELIT

Air-termination pole wall mounted V4A-AI

4.5 m wall-mounted air-termination pole Ø42mm in acid-resistant A2 steel

Technical description

Air-termination pole with welded-on connection pipe (anti-slip) including KS coupling and interception tip according to DIN EN 62561-2 for wall mounting.
 Multi-component system that can be plugged into each other with screw fastening.
 Material of air-termination pole: acid-resistant A2 steel
 Diameter of air-termination pole: Ø 42/36 mm
 Material of air-termination rod: aluminium
 Diameter of air-termination rod: Ø 16/10 mm
 Material of KS coupling: acid-resistant A2 steel
 Adaptation in KS coupling: Ø 8-10 mm
 Type: 2-part
 Length of parts: 3500 mm/1000 mm
 Required wall mounting: [2x] type B
 Unsupported length FL1: 3.8 m
 Clamp length EL1: 0.7 m
 Max. wind speed:
 Wind safety factor 1.0: 196 km/h
 Wind safety factor 1.5: 160 km/h

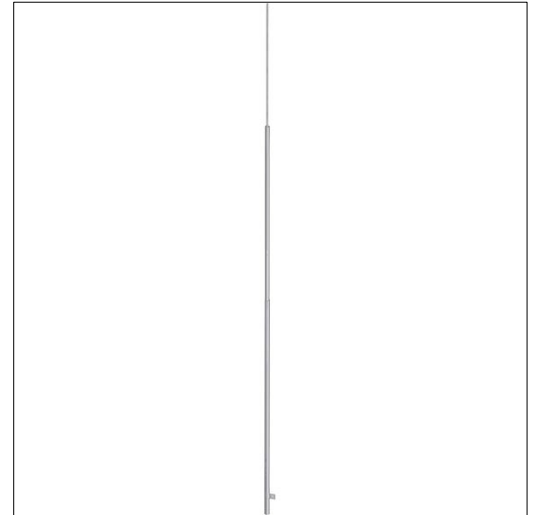

Advantages:

4.5 m wall-mounted air-termination pole in acid-resistant A2 steel
 Multi-component system that can be plugged into each other with screw fastening
 The material of the air-termination rod is aluminum, has a length of 1000mm and Ø16/10 mm
 The material of the air-termination pole is acid-resistant steel, has a length of 3500mm and Ø42/36 mm
 Safety factor for wind 1.0: 196 km/h
 Safety factor for wind 1.5: 160 km/h
 Manufactured in accordance with EN 62561-2

Product name/ Art.nr/ GTIN	ELIT LOFV-V4A-ALU-4500MM/ 40150233/ 7070810038978
According to:	EN 62561-2
Length	4500 Millimetre
Diameter	42 - 10 Millimetre
Model	Interception rod tapered
Material	Stainless steel 316 (V4A)
Surface protection	Other
Connection	Round conductor