



# ELIT

## Freestanding air-termination SET 6.5m w/side

Freestanding air-termination set in stainless A2 steel 6.5m with HVC flange and side termination 2.0m

### Technical description

Freestanding air-termination set 6.5 m long with side air-termination rod 2.0 m and HVC flange, including stand and concrete foundations.

Material and dimensions of the air-termination pole: A2 steel/aluminium, Ø 36/16/10 mm, 3.3 m length.

Material and dimensions of the side arrester: A2 steel/aluminium, Ø 20/16/10 mm, 2.0 m length.

Material and dimensions of the insulating support: Glass fibre reinforced plastic, Ø 48 mm, 1.7 m length.

Material and dimensions of the stand: Stainless A2 steel, Ø 60 mm, 1.5 m length.

Concrete base: 6 x 25 kg.

Footprint: 1870 x 1670 mm.

For wind speeds of 129 km/h according to Eurocode - Corresponding to WZ1, GK2, max. 20 m construction height.

Manufactured in accordance with EN 62561-2



Total weight: Approx. 196 kg.

### Advantages:

Freestanding air-termination set 6.5m in stainless A2 steel and side termination rod 2.0m

Comes with HVC flange that enables installation of 4 x HVC conductors

Complete set including stand and concrete foundations

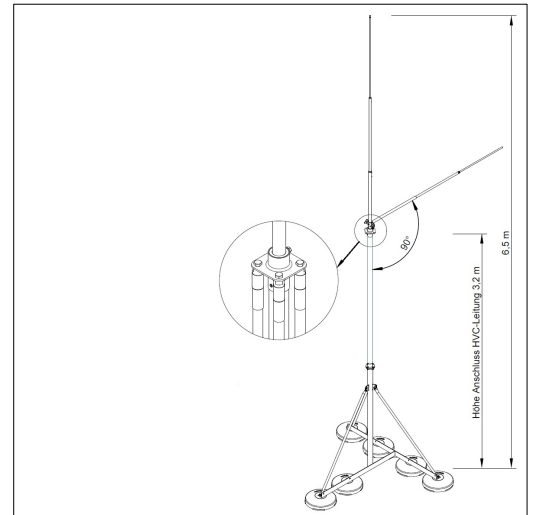

Product name/ Art.nr/ GTIN	ELIT FRITT-LOFSETT-65M-HVC/ 40150239/ 7070810040612
According to:	EN IEC 62561-2, IEC/TS 62561-8
Length	6500 Millimetre
Diameter	60 - 10 Millimetre
Model	Interception rod with tripod
Material	Aluminium/stainless steel 304 (V2A)
Surface protection	Hot-dip galvanized
Connection	Round conductor