



ELIT

Wall-mounted air-termination pole 9m V4A

9.0m wall-mounted 3-part air-termination pole in acid-resistant A4 steel

Technical description

Air-termination pole with welded-on connection pipe (slip protection) including KS coupling manufactured according to DIN EN 62561-2 for wall mounting.

3-part multi-component system that can be plugged into each other with screw fastening.

Material: acid-resistant A4 steel

Pole diameter: Ø 60/42/36/20 mm

Air-termination rod material: acid-resistant A4 steel

Air-termination rod diameter: Ø 16/10 mm

KS connector material: acid-resistant steel

Down conductor diameter for KS connector: Ø 8-10 mm

Length of parts: 4000 mm/2500 mm/2500 mm

Required wall mount: 3 x type C

Unsupported length FL1: 7.7 m

Clamp length EL1: 1.3 m


Clamp length EL2: 0.5 m

Max. wind speed:

Safety factor for wind 1.0: 200 km/h /

Safety factor for wind 1.5: 163 km/h

Weight: 30.6 kg

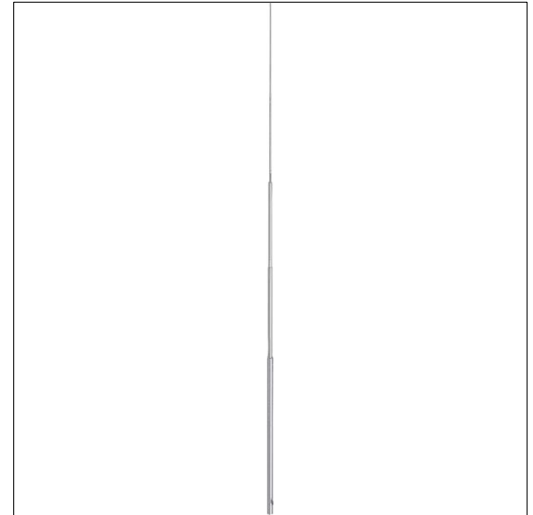

Advantages:

Wall-mounted 3-part lightning air-termination pole in acid-resistant A4 steel

Multi-component system that can be plugged into each other with screw fixing

Mounted on the wall with 3 x Type C wall fixings

Product name/ Art.nr/ GTIN	ELIT LOF-VEGG-9M-V4A-TYPC/ 40150250/ 7070810040957
According to:	EN 62561-2
Length	9000 Millimetre
Diameter	60 - 10 Millimetre
Model	Interception rod tapered
Material	Stainless steel 316 (V4A)
Surface protection	Hot-dip galvanized
Connection	Round conductor