




# ELIT ISOTP60M12

Insulating spacer for use on voltages <1000V AC/DC

## Technical description

Low voltage insulator in 60mm height and with M12 thread. The insulator is mainly used to insulate live copper rails from the substrate or to support earth rails. Operating temperature from -40°C and up to +130°C. The polyamide materials are reinforced with fiberglass and are halogen-free. Electro-galvanized steel insert and threaded according to ISO standard. Great stability on electrical and mechanical parameters. Self-extinguishing according to UL94 VO. Rated voltage is 1000V AC/DC. Dielectric power is 1500V AC/DC

## Advantages:

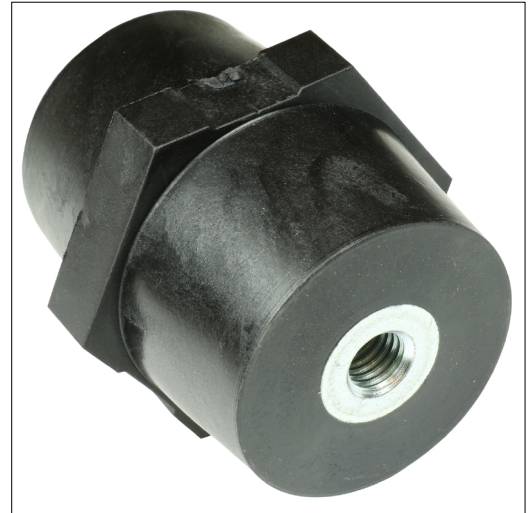

| Product name/ Art.nr/ GTIN | ELIT ISOTP60M12/ 20350030/ 7070811201067 |
|----------------------------|--|
| According to:              | ---                                      |
| Bolt dimension (metric)    | 12                                       |
| Length                     | 60 Millimetre                            |
| Outer diameter             | 63 Millimetre                            |