




ELIT LOM-VEGG-6M-HVC

Air-termination pole for wall mounting 6m for



6.0 m long wall-mounted air-termination pole in A2 steel and fiberglass w/external HVC installation

Technical description

6.0 m long air-termination mast for wall mounting according to DIN EN 62561-2 for HVC conductors.

For external HVC installations or for mesh systems.

Material of the air-termination mast: stainless A2 steel

Diameter and length, mast: Ø 60 mm, 1.5 m length

Material of the insulating support: GRP (Glass fiber reinforced plastic)

Diameter and length, GRP: Ø 48 mm, 1.7 m length

Air-termination rod, material and type: telescopic aluminum, variable length

Diameter and length, air-termination rod: Ø 32/22/10 mm, 2.4 m length

Height of HVC cable connection: 3.2 m

Connection HVC conductor: Up to 4 HVC conductors can be connected

Required wall brackets: 2x Type C

Unsupported length (FL1): 5.0 m

Terminal length (EL1): 1.0 m


Max. wind speed (safety factor 1.0): 196 km/h

Max. wind speed (safety factor 1.5): 160 km/h

Manufactured in accordance with DIN EN 62561-2 and DIN IEC/TS 62561-8

Transport length approx.: 2.0 m

Weight: 12.6 kg

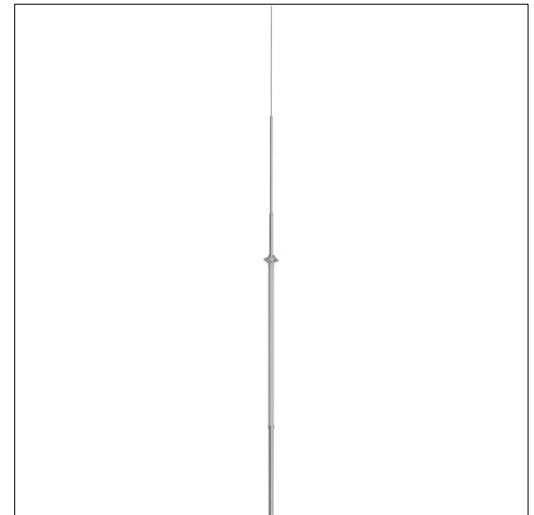

Advantages:

6.0 m long wall-mounted telescopic air-termination pole made of stainless A2 steel

Exterior installation with up to 4 HVC conductors

Max. wind speed (safety factor 1.0): 196 km/h

Max. wind speed (safety factor 1.5): 160 km/h

Manufactured according to DIN EN 62561-2 and DIN IEC/TS 62561-8

Product name/ Art.nr/ GTIN	ELIT LOM-VEGG-6M-HVC/ 40150121/ 7070810031177
According to:	DIN EN 62561-2, IEC/TS 62561-8
Length	6000 Millimetre
Diameter	60 - 10 Millimetre
Model	Interception rod tapered
Telescopic	Yes
Material	Aluminium/stainless steel 304 (V2A)
Surface protection	Hot-dip galvanized
Connection	Round conductor