



# ELIT

## Air-termination pole wall mounted 12m

ELIT Air-termination pole for wall mounting 12m Ø60-10mm

### Technical description

12,0 m air-termination pole with welded-on connection pipe (slip protection) including KS coupling and air-termination rod according to DIN EN 62561-2 for wall mounting.

3-part multi-component system that can be plugged onto each other with a screw connection.

Length of parts: 6000 mm/3500 mm/2500 mm

Air-termination pole, material: stainless steel A2

Air-termination pole, diameter: Ø 60/42/36/20 mm

Air-termination rod, material: aluminium

Air-termination rod, diameter: Ø 16/10 mm

KS connector material: stainless steel A2

Conductor diameter for KS connector: Ø 8-10 mm

Required wall mount: [3x] type C

Unsupported length FL1: 10.4 m


Clamp length EL1: 1.6 m

Clamp length EL2: 0.6 m

Max. wind speed:

Safety factor for wind 1.0: 157 km/h /

Safety factor for wind 1.5: 128 km/h

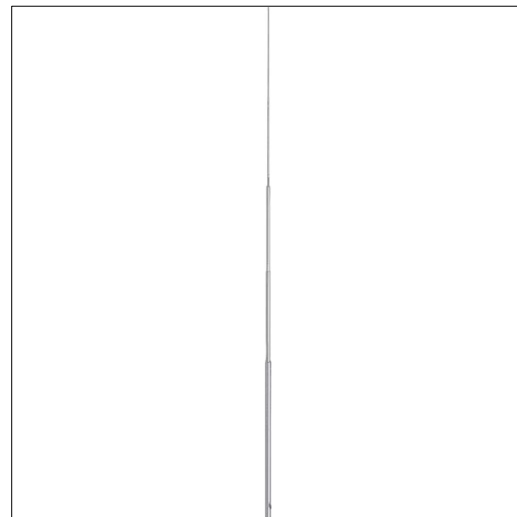

### Advantages:

12,0 m air-termination pole with welded connection pipe including KS coupling and arrester tip

3-part multi-component system that can be plugged into each other with screw fastening

The mast is made of stainless steel, while the lightning arrester tip is made of solid aluminium

The product weighs 42.9 kg and can withstand wind speeds of up to 157 km/h

Manufactured according to DIN EN 62561-2 for wall mounting



Product name/ Art.nr/ GTIN	ELIT LOF-VEGGMONTERT-St-Al 12m ø60-10mm/ 40150133/ 7070810033300
According to:	EN 62561-2
Length	12000 Millimetre
Diameter	60 - 10 Millimetre
Model	Interception rod
Telescopic	No
Material	Stainless steel 304 (V2A)
Surface protection	Other
Connection	Round conductor