




ELIT LOF-VEGG-V4A-6M

Lightning arrester V4A wall-mounted 6.0 m

6.0m wall-mounted 3-part air-termination pole in acid-proof steel and aluminum

Technical description

Lightning arrester with welded-on connection pipe (slip protection) including KS coupling manufactured according to DIN EN 62561-2 for wall mounting.
3-part multi-component system that can be plugged into each other with screw fastening.
Material for mast (pole): acid-proof steel
Diameter of air-termination mast (pole): \varnothing 60/42/36/20 mm
Material for air-termination tip: aluminium
Diameter of air-termination tip: \varnothing 16/10 mm
Material for KS coupling: acid-proof steel
Down conductor diameter for KS coupling: \varnothing 8-10 mm
Length of parts: 2000 mm/2000 mm/2000 mm
Required wall mounting: 2 x type C
Unsupported length FL1: 5.0 m
Clamp length EL1: 1.0 m
Max. wind speed:
Wind safety factor 1.0: 198 km/h /
Wind safety factor 1.5: 162 km/h
Weight: 18.9 kg

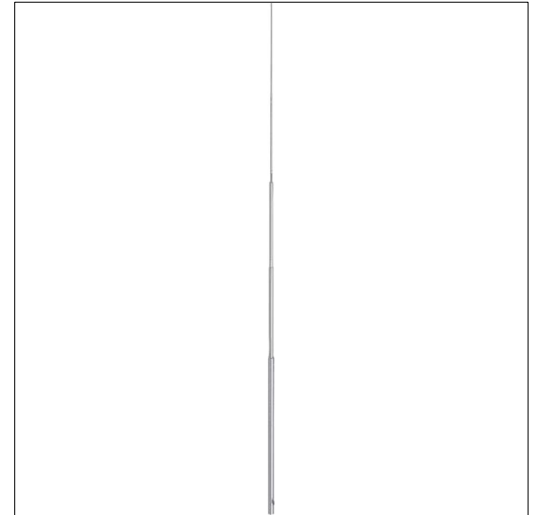

Advantages:

Wall-mounted 3-part lightning arrester in acid-proof steel
Multi-component system that can be plugged into each other with screw fastening
Each part has a length of 2000 mm, and the total length is 6000 mm

Product name/ Art.nr/ GTIN	ELIT LOF-VEGG-V4A-6M/ 40150222/ 7070810038831
According to:	EN 62561-2
Length	6000 Millimetre
Diameter	60 - 16 Millimetre
Model	Interception rod tapered
Material	Stainless steel 316 (V4A)
Surface protection	Other
Connection	Round conductor