

ELIT

HVC-85 pipe clamp in stainless steel without

HVC-85 pipe clamp in stainless steel without tension band

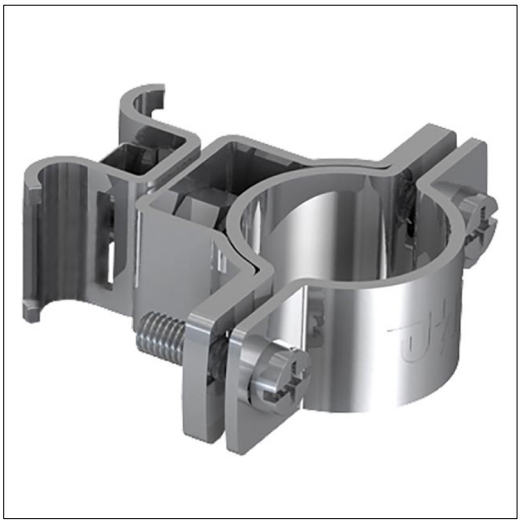

Technical description

Down conductor clamp made of stainless A2 steel for attaching high voltage cable HVC-85 to mast/pipe.
Low type tension lock for mounting on pipe / air-termination / mast.
Type without tape (for tape width 15 mm)
Material in pipe clamp: stainless steel
Material in conductor clamp: stainless steel
Dimension of conductor clamp: Ø 28 mm
Height of conductor guide: 27 mm (distance from mast out to cable)
Manufactured in accordance with EN62561-4
NB!
Clamp is delivered without 15 mm fastening tape which can be ordered on a roll of 25 m or 50 m.

Advantages:

Can be attached to a wide range of air-terminations and masts
Made of stainless steel and provides 27 mm distance to the substrate
Quick and easy to attach and for universal use
Manufactured according to EN62561-4



Product name/ Art.nr/ GTIN	ELIT HVC85-RORFESTE-V2A/ 40170081/ 7070810036349
According to:	EN62561-4
Mounting type conductor	With screw clamp
Suitable for diameter round conductor	28 - 28 Millimetre
Material of holder	Stainless steel 304 (V2A)
Mounting type holder	Tension band
Material of carrier	Stainless steel 304 (V2A)
Material of saddle clamp	Stainless steel 304 (V2A)
Material base part	Stainless steel 304 (V2A)
Pipe chucking range	30 - 914 Millimetre
Wall distance	27 - 27 Millimetre
Assembly height conductor holder	60,5 Millimetre