




# ELIT ISOTP75M10

Insulating spacer for use on voltages <1000V AC/DC

## Technical description

Low voltage insulator in 75mm height and with M10 thread. The insulator is mainly used to insulate live copper rails from the substrate or to support earth rails. Operating temperature from -40°C and up to +130°C. The polyamide materials are reinforced with fiberglass and are halogen-free. Electro-galvanized steel insert and threaded according to ISO standard. Great stability on electrical and mechanical parameters. Self-extinguishing according to UL94 VO. Rated voltage is 1000V AC/DC. Dielectric power is 1500V AC/DC

## Advantages:

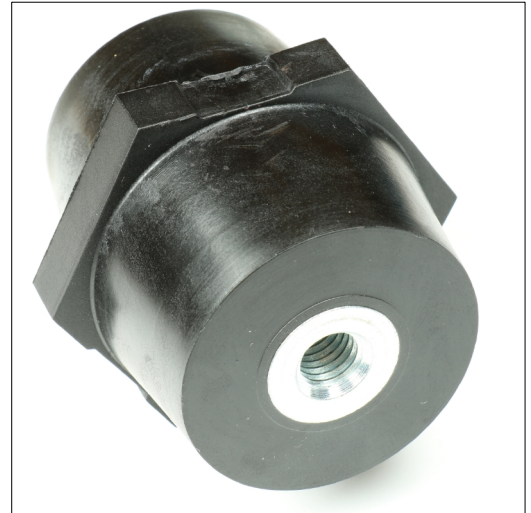

Product name/ Art.nr/ GTIN	ELIT ISOTP75M10/ 20350035/ 7070811201111
According to:	---
Bolt dimension (metric)	10
Length	75 Millimetre
Outer diameter	75 Millimetre