



ELIT LOF-VEGG-V4A-3M

Air-termination pole V4A wall mounted 3.0 m

3.0 m wall-mounted air-termination pole Ø42-10mm in acid-resistant 316 steel, consists of two parts

Technical description

Air-termination pole with welded-on connection pipe (slip protection) including KS coupling and interception tip according to DIN EN 62561-2 for wall mounting.

Multi-component system that can be plugged into each other with screw fastening.

Material of the air-termination pole: acid-resistant 316 steel

Diameter of the air-termination pole: Ø 42 mm

Material of the air-termination rod: aluminum

Diameter of the air-termination rod: Ø 16/10 mm

Material of the KS coupling: acid-resistant A2 steel

Adaptation in the KS coupling: Ø 8-10 mm

Type: 2-part

Length of parts: 1500 mm/1500 mm

Required wall mounting: [2x] type A


Unsupported length FL1: 2.50 m

Clamp length EL1: 0.5 m

Max. wind speed:

Wind safety factor 1.0: 150 km/h

Wind safety factor 1.5: 123 km/h

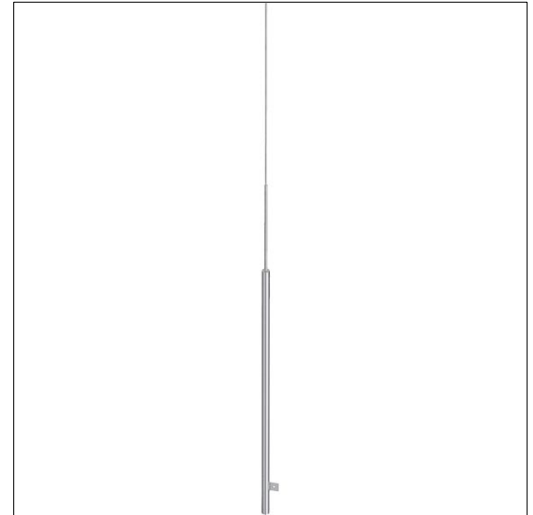

Advantages:

Air-termination pole made of acid-resistant 316 steel

Tapered Ø 42/10 mm, total length 3.0 m

Produced according to DIN EN 62561-2 for wall mounting

Multi-component system that can be plugged into each other with screw fastening

Product name/ Art.nr/ GTIN	ELIT LOF-VEGG-V4A-3M/ 40150225/ 7070810038893
According to:	EN 62561-2
Length	3000 Millimetre
Diameter	42 - 10 Millimetre
Model	Interception rod tapered
Material	Stainless steel 316 (V4A)
Surface protection	Other
Connection	Round conductor
High-voltage-proof insulated model	Yes